HANGCHA

**ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.**

**Factory site:** 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926771
Fax: +86-571-88926789

parts_cn@hcforklift.com
www.hcforklift.com

Follow us on Facebook

Follow us on YouTube

Follow us on WeChat

Download "Hangcha Forklift" App

ISO14001:2015


ISO9001:2015

2020 VERSION 1/COPYRIGHT 2020/12

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models.

# FORKLIFT ATTACHMENT

Fork Positioner/Paper Roll Clamp/Bale Clamp/ Push and Pull/... More than 3000 models attachment available.

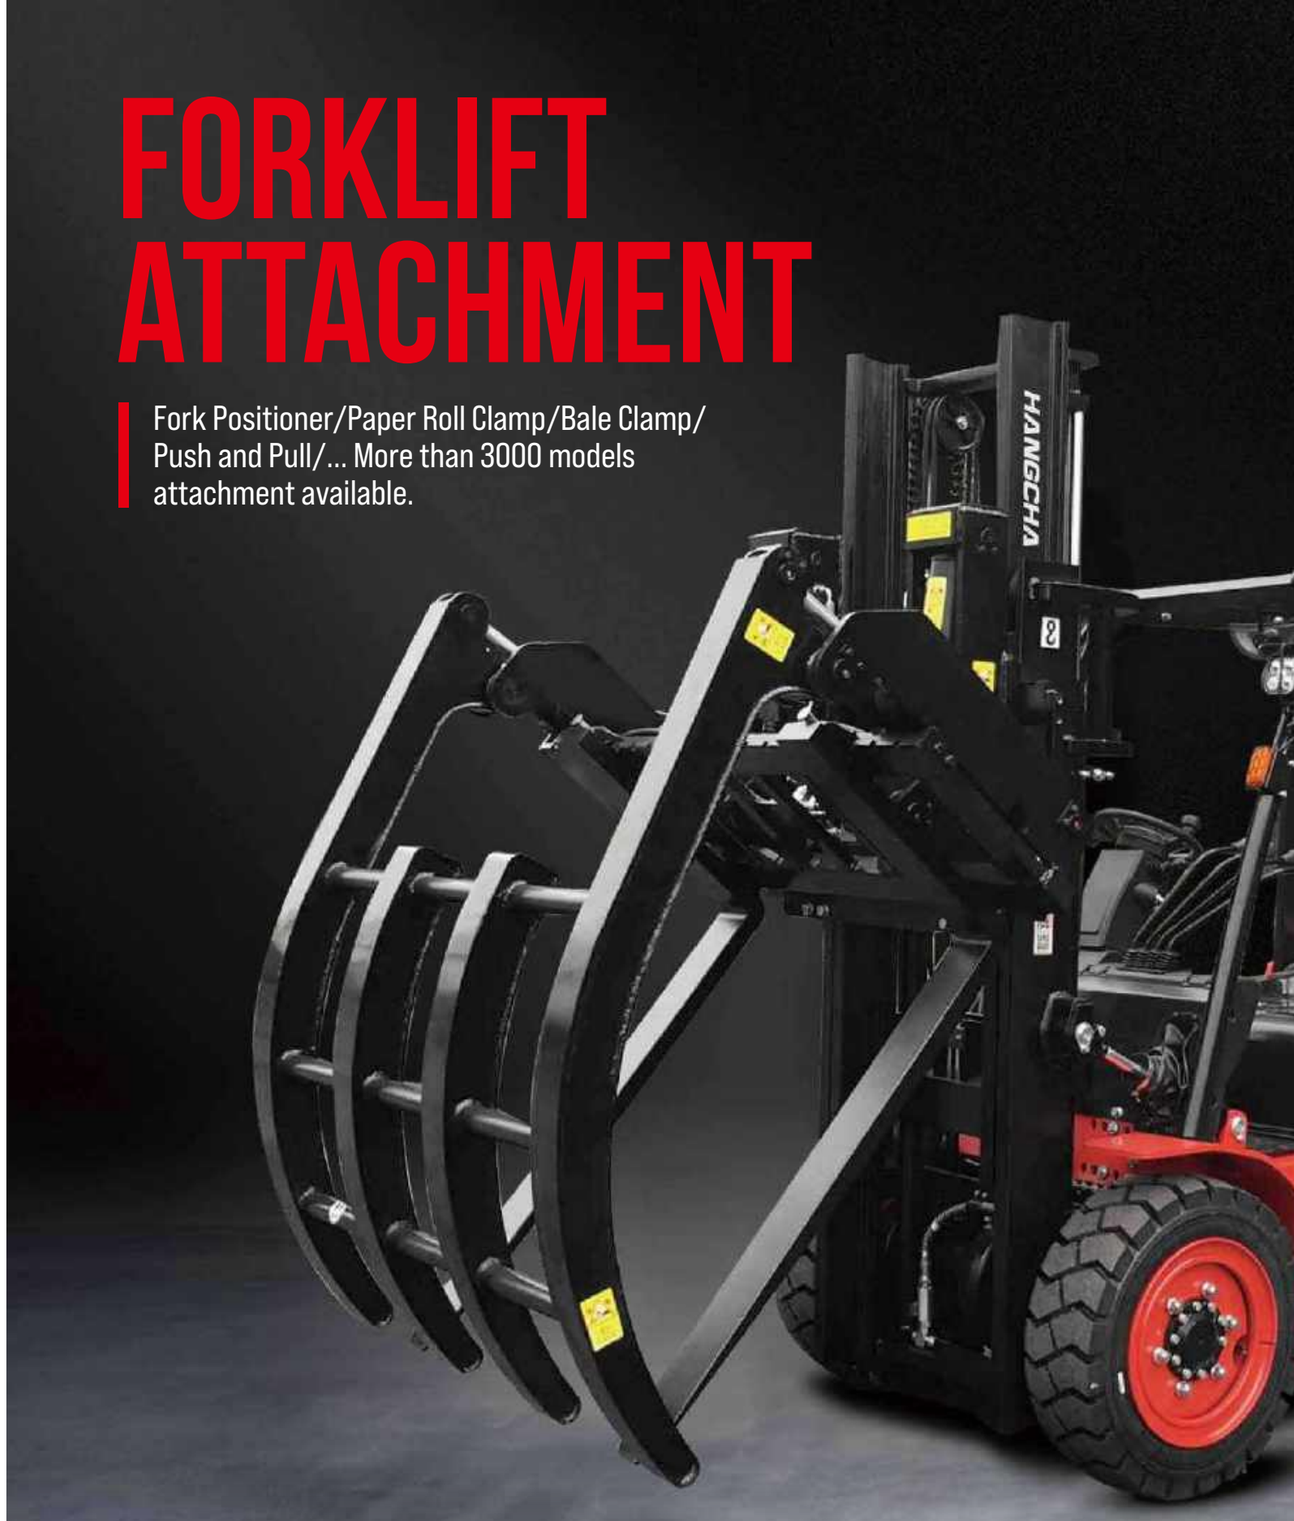


*The World of Hangcha*
SINCE 1956

HANGCHA

# ABOUT US

Hangzhou Hangcha Kangli Forklift Attachment Co., Ltd, founded in 1998, is a 100% owned subsidiary of Hangcha Group. With continuous growth of the Hangcha Group, it is to be a professional forklift attachment company integrating R&D, manufacturing, sales and service. We have a variety of attachments, which is more than 30 series with over than 3000 models including side shifter, fork positioner, bale clamp, paper roll clamp, tyre clamp, drum clamp, multi-purpose clamp, reach forks, push& pull, rotator, tilting forks, bucket and so on. Also we can customize attachments according to your special working conditions. Relying on high quality resource of our National Laboratory, we can make the simulation tests on each product.
Hangcha can provide efficient equipment for loading, unloading, stacking and short-distance transportation.

We aim to :
**--Higher productivity**
**--Lower operator stress**
**--Save time & cost**
**--Add values of forklifts**
**--Boost forklift sales**

Company mission:

Make material handling easier.









# FORK POSITIONER




## HOW TO CHOOSE

1. Fork positioner option for 1.5ton-16ton.
2. 4-spool hydraulic valves & 4 hose cycles will be needed.
3. Provide the mast type information of your current forklift.
4. More options, please refer to the product manual.

## CHARACTERISTICS

1. Adjust the size between the forks according to the pallet size.
2. Forks can single move or simultaneously move.
3. Can be equipped with side shift function.

## SPECIFICATION

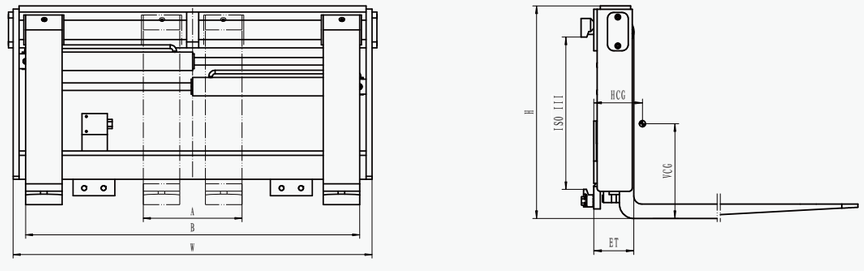


| Capacity@ Load Center | Catalog Model No. | Adjusting Range | Width of Fork Carriage | Weight | Truck Mounting Class | Effective Trickness (ET) | Horizontal Center of Gravity (HCG) | Available Forklift |
|---|---|---|---|---|---|---|---|---|
| kg@mm | | mm | mm | kg | | mm | mm | t |
| 3500@500 | 3CS17G-00-1200 | 330-1120 | 1200 | 295 | III | 80 | 60 | 3-3.5 |

# PAPER ROLL CLAMP




## HOW TO CHOOSE

1. Paper roll clamp option for 1.5T-10T.
2. 4-spool hydraulic valves & 4 hose cycles will be needed.
3. Should provide material type, height, weight, diameter.
4. More options, please refer to the product manual.

## CHARACTERISTICS

1. For different kinds of paper roll material.
2. Equipped with suitable armboard.
3. Optional function of rotate or side shift.
4. Short arm is fixed or adjustable, for smaller roller.

## SPECIFICATION

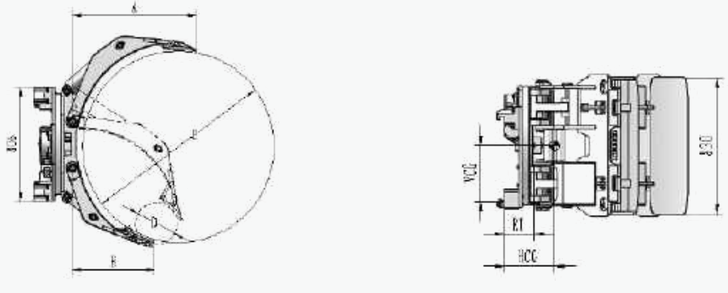


| Capacity@ Max Diameter | Catalog Model No. | Opening Range | Mounting Class | Weight | Effective Trickness (ET) | Horizontal Center of Gravity (HCG) | Available Forklift |
|---|---|---|---|---|---|---|---|
| kg@mm | | mm | | kg | mm | mm | t |
| 2000@1400 | 3CS2K-14 | 350-1400 | III | 735 | 200 | 225 | 3-3.5 |

# BALE CLAMP




## HOW TO CHOOSE

1. Bale clamp option for 1.5T-10T.
2. 4-spool hydraulic valves & 4 hose cycles will be needed.
3. Should provide material type, size, weight.
4. More options, please refer to the product manual.

## CHARACTERISTICS

1. For different kinds of soft package.
2. Optional function of rotate or side shift.
3. Widely used in the plant of cotton, waste paper, farm, chemical fiber, scrap iron.

## SPECIFICATION

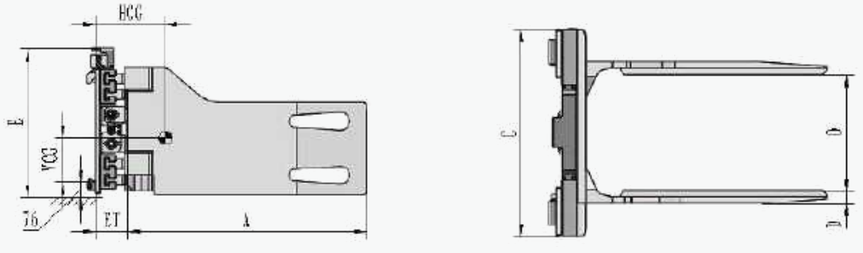


| Capacity@ Load Center | Catalog Model No. | Mounting Class | Opening Range | Arm Thickness | Arm Height (A) | Arm Lenght (B) | Frame Width (C) | Weight | Effective Trickness (ET) | Horizontal Center of Gravity (HCG) | Available Forklift |
|---|---|---|---|---|---|---|---|---|---|---|---|
| kg | | | mm | mm | mm | mm | | kg | mm | mm | t |
| 2500@500 | ES9B-BCS-122B-J | III | 550-1880 | 65 | 465 | 1220 | 1038 | 565 | 170 | 390 | 3-3.5 |

# PUSH AND PULL




## HOW TO CHOOSE

1. Push & pull option for 1.5T-3.5T.
2. 4-spool hydraulic valves & 4 hose cycles will be needed.
3. Should provide push stroke, pallet goods size, weight.
4. Saving slip sheet or side shifter function, should be noticed before ordered.
5. More options, please refer to the product manual.

## CHARACTERISTICS

1. Applicable in the industry of beer, beverage, chemical fertilizer, plastic particles, ceramic tiles and so on.
2. Push and pull function in one control handle.
3. Suitable in container load and unload.
4. Can equip with side shift function or slide paper stay or left.

## SPECIFICATION

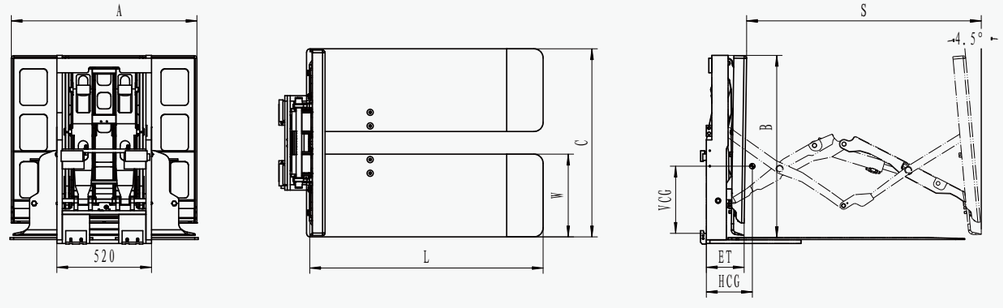


| Capacity@ Load Center | Catalog Model No. | Mounting Class | Stroke | Weight | Effective Trickness (ET) | Platen Size (LXW) | Outside Platen Spacing (C) | Horizontal Center Of Gravity (HCG) | Available Forklift |
|---|---|---|---|---|---|---|---|---|---|
| kg@mm | | | mm | kg | mm | mm | mm | mm | t |
| 2000@600 | 3CS40-1211B-KL2 | III | 1200 | 605 | 272 | 1220x455 | 1015 or 1220 | 240 | 3.5 |

# MORE ATTACHMENT OPTIONS

*Benefit from additional attachments to help the forklift do their job better.*











